SC-20KV-277 SPD Surge Protection Device 20kV LED Surge Protector

Basic Information

• Place of Origin: Shenzhen, Guangdong, China

• Brand Name: SOCAY

Certification: UL,REACH,RoHS,ISO

Model Number: SC-20KV-277
Minimum Order Quantity: 270PCS
Price: Negotiable
Packaging Details: PP bag
Delivery Time: 1-3 weeks



Product Specification

Protector Name: SPD DeviceProtector Size: 41×32×19.5mm

Protector Rated Operating 220VAC

Voltage:

• Protector Max. Continuous 277VAC

Voltage:

Protector Response Time: 25ns
Protector Vn: 20kV
Protector L-N/PE: 1.3kV
Protector N-PE: 1.1kV

• Highlight: Surge Protection Device 20kV,

SPD Surge Protection Device, 20kV LED Surge Protector

Product Description

Original Factory Supply SC-20KV-277 Surge Protection Device 20kV Led Surge Protector

Surge Protection Device DATASHEET: SC-20KV-277_v2209.1.pdf

Product features

To protection Led light when lightning thounder , the circuit board safe .


Led Surge Protector Applications:

Led Road light roadway lighting Traffic Lighting Ensure electricity supply Intelligent Lighting Control System on Parking lots tunnel lighting

Led Surge Protector Electrical Characteristics:

Lea dange i rotector Electrical Orial acteristics.				
SPD Symbol	Led Surge Protector Parameter	Value	Unit	
Led Surge Protector Electrical Parameters	Rated Operating Voltage	220	VAC	
	Max. Continuous Voltage	277	VAC	
	Led Surge Protector Response Time	25	ns	
	Led Surge Protector Cross-section Area	1.5	mm2	
Led Surge Protector Surge Parameters	Nominal Discharge Voltage (1.2/50µs) (Vn)	20	kV	
Led Surge Protector Voltage Protection Level (Up)	Led Surge Protector L-N/PE	1.3	kV	
	Led Surge Protector N-PE	1.1	kV	


Led Surge Protector Application/ Inatallation Schematic:

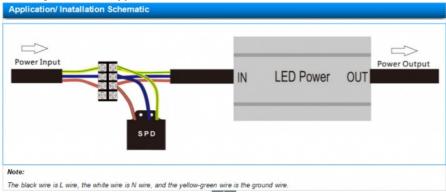

Note

The black wire is L wire, the white wire is N wire, and the yellow-green wire is the ground wire.


Led Surge Protector Typical Dimension:

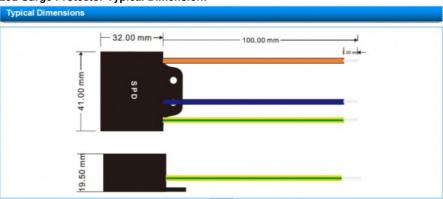

Led Surge Protector Packaging Information:

SPD Part Number	SPD Quantity
SC-20KV-277	270 PCS / Box



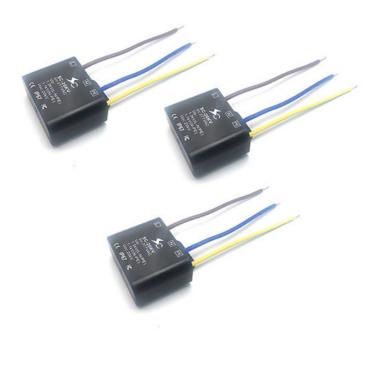



SOCAY® Shenzhen Socay Electronics Co., Ltd.



+8618126201429



sylvia@socay.com



socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City, GuangDong Province, China